



BA115




BASS AMPLIFIER

Owner's Manual

Ampeg BA115 BASS AMPLIFIER

TOP PANEL:

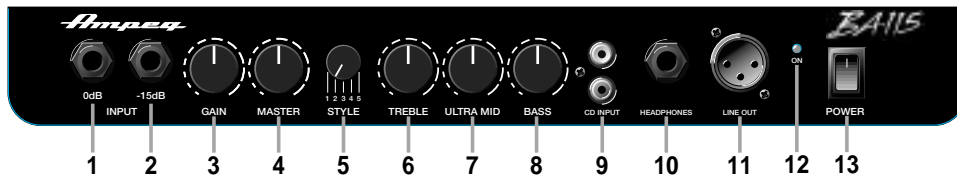

1. 0dB INPUT: Connect your “passive” bass guitar here using a shielded instrument cable. This input is not padded and is best suited for basses without active electronics or “hot” pickups.

2. -15dB INPUT: Connect your “active” bass here using a shielded instrument cable. This input is padded 15dB and is best suited for basses with active electronics and/or “hot” pickups.

3. GAIN: Use this control in conjunction with your instrument’s volume controls to adjust the level of the signal sent to the preamp.

4. MASTER: Use this control to adjust the overall listening level of the amplifier. This control is also used to adjust the signal level at the Line Out jack (#11).

5. STYLE: This five-position switch is used to control the tone of the amplifier. Please refer to the TECHNICAL SPECIFICATIONS on the back page of this manual for an explanation of the function of each position. Experiment with the Style and other eq controls (#6,7,8) for the results which suit you best.

6. TREBLE: This control is used in conjunction with the style control to adjust the high frequency level of the amplifier.

7. ULTRA MID: This control is used in conjunction with the style control to adjust the midrange level of the amplifier.

8. BASS: This control is used in conjunction with the style control to adjust the low frequency level of the amplifier.

9. CD INPUT: These jacks (RCA type) are used to connect the line level (or headphones) output of a CD player or tape deck. The inputs to these jacks are summed into a mono signal which is fed into the BA115 just prior to its power amplifier. Use the volume control on the CD or tape player to control the output level.

10. HEADPHONES: The internal speaker is disconnected when the headphones jack is used.

11. LINE OUT: This jack supplies a post-eq, balanced line level signal for connecting to a house sound board, recording unit or external amplifier. The amplitude of this signal is adjusted by the Master control (#4).

12. ON LED: This LED is illuminated when the amplifier is plugged in and turned on.

13. POWER: This switch is used to turn the amplifier on or off.











Ampeg BA115 BASS AMPLIFIER

IMPORTANT SAFEGUARDS AND PRECAUTIONS:

All Ampeg products are designed for continuous safe operation. Abiding by the following rules can help prevent damage to your amplifier, yourself and others.

- The amplifier is equipped with a three-pronged AC power cord. To reduce the risk of electrical shock, **NEVER** remove or otherwise attempt to defeat the ground pin of the power cord.
- Connect the amplifier **ONLY** to a properly grounded AC outlet of the proper voltage for your amp.
- Avoid sudden temperature extremes, rain and moisture. Also, avoid sudden and intense impact. (If the unit has been subjected to any of the preceding abuses, have it looked at by an authorized service center.)
- **NEVER** set the amplifier on a support that will not bear its weight.
- Always keep the total speaker impedance at or above the rated load.
- Unplug the amplifier before cleaning it. **NEVER** spray liquid cleaners onto the amplifier. Wipe it with a slightly dampened, lint-free cloth to remove dirt and film.
- **DO NOT** use the amplifier if it has sustained damage to the chassis, controls, or power cord. Refer the unit to an authorized service center for inspection.
- Prolonged exposure to high volume levels may cause permanent hearing loss or damage. Such damage is progressive and irreversible!

 <p>CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN</p>  <p>CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER. NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.</p>	 <p>ATTENTION RISQUE D'ELECTROCUTION NE PAS OUVRIR</p>  <p>ATTENTION: POUR REDUIRE D'ELECTROCUTION NE PAS ENLEVER LE COUVERCLE. AUCUNE PIECE INTERNE N'EST REPARABLE PAR L'UTILISATEUR. POUR TOUTE REPARATION, S'ADRESSER A UN TECHNICIEN QUALIFIE.</p>	 <p>VORSICHT ELEKTRISCHE SCHLAGEGFAHR NICHT OFFENEN</p>  <p>VORSICHT: ZUR MINIMIERUNG ELEKTRISCHER SCHLAGEGFAHR NICHT DEN DECKEL ABNEMMEN. INTERNE TEILE KONNEN NICHT VOM BENUTZER GEWARTET WERDEN. DIE WARTUNG IS QUALIFIZIERTEM WARTUNGSPERSONAL ZU UBERLASSEN.</p>
<p>THIS EQUIPMENT HAS BEEN DESIGNED AND ENGINEERED TO PROVIDE SAFE AND RELIABLE OPERATION. IN ORDER TO PROLONG THE LIFE OF THE UNIT AND PREVENT ACCIDENTAL DAMAGES OR INJURY, PLEASE FOLLOW THESE PRECAUTIONARY GUIDELINES:</p>		
<p>CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT OPEN CHASSIS; DO NOT DEFEAT OR REMOVE THE GROUND PIN OF THE POWER CORD; CONNECT ONLY TO A PROPERLY GROUNDED AC POWER OUTLET.</p>		
<p>WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.</p>		
<p>CAUTION: NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.</p>		
<p>CAUTION: OUR AMPLIFIERS ARE CAPABLE OF PRODUCING HIGH SOUND PRESSURE LEVELS. CONTINUED EXPOSURE TO HIGH SOUND PRESSURE LEVELS CAN CAUSE PERMANENT HEARING IMPAIRMENT OR LOSS. USER CAUTION IS ADVISED AND EAR PROTECTION IS RECOMMENDED IF UNIT IS OPERATED AT HIGH VOLUME.</p>		
<p>EXPLANATION OF GRAPHICAL SYMBOLS: EXPLICACION DE SIMBOLOS GRAFICOS: EXPLICATION DES SYMBOLES GRAPHIQUES:</p>	 = "DANGEROUS VOLTAGE" "VOLTAGE PELIGROSO" "DANGER HAUTE TENSION" "GEFAHLICHE SPANNUNG"	 = "IT IS NECESSARY FOR THE USER TO REFER TO THE INSTRUCTION MANUAL." "ES NECESARIO QUE EL USUARIO SE REFIERA AL MANUAL DE INSTRUCCIONES." "REFERREZ-VOUS AU MANUAL D'UTILISATION" "UNBEDINGT IN DER BEDIENUNGSANLEITUNG NACHSCHLAGEN"




Ampeg BA115 BASS AMPLIFIER

TECHNICAL SPECIFICATIONS:

OUTPUT POWER RATING	100 Watts at 4 ohms
MAX INPUT LEVELS	0dB Input: 1.75V RMS -15dB Input: 9.75V RMS CD Input: 5V RMS
LINE OUT LEVEL	120mV RMS
HEADPHONE OUT LEVEL	3.75V RMS
GAIN	39dB
STYLE	1 = -25dB @500Hz 2 = -12dB @500Hz 3 = flat 4 = +5dB @2kHz and above 5 = -6dB @50Hz and below
TREBLE	40dB range @10kHz
ULTRA MID	30dB range @500Hz
BASS	36dB range @50Hz
SPEAKER SPECS	15", 150 w, 4 ohm, 2.5" voice coil dia., 56 oz. magnet; Piezo tweeter
POWER REQUIREMENTS	120VAC, 60Hz, 70VA 100/115VAC, 50/60Hz, 70VA 230VAC, 50/60Hz, 70VA
SIZE AND WEIGHT	21" W x 21" H x 15-1/2" D; 62 lbs.

SYSTEM BLOCK DIAGRAM:

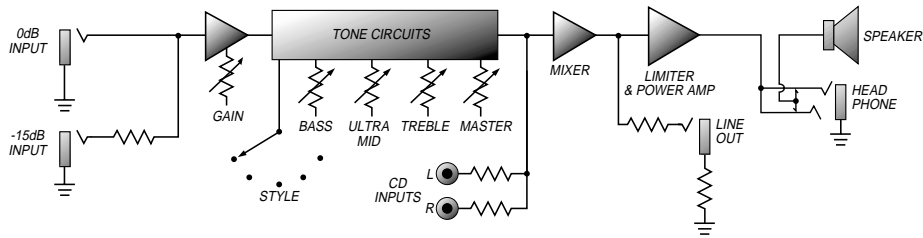

Ampeg continually develops new products, as well as improves existing ones. For this reason, the specifications and information in this manual are subject to change without notice.



www.ampeg.com

